

Tiger Neo N-type

78HL4-BDV

610-630 Watt

BIFACIAL MODULE WITH
DUAL GLASS

N-Type

Positive power tolerance of 0~+3%


IEC61215(2016), IEC61730(2016)

ISO9001:2015: Quality Management System

ISO14001:2015: Environment Management System

ISO45001:2018

Occupational health and safety management systems

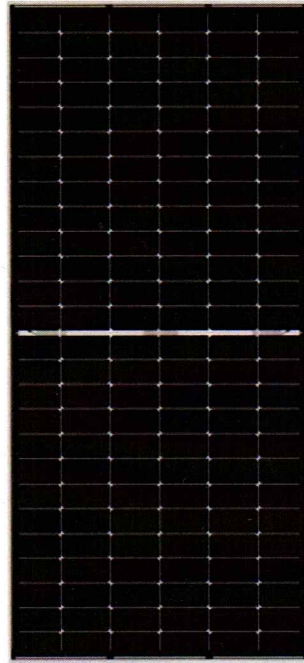

Key Features



SMBB Technology

Better light trapping and current collection to improve module power output and reliability.



PID Resistance

Excellent Anti-PID performance guarantee via optimized mass-production process and materials control.



Higher Power Output

Module power increases 5-25% generally, bringing significantly lower LCOE and higher IRR.



Hot 2.0 Technology

The N-type module with Hot 2.0 technology has better reliability and lower LID/LETID.




Enhanced Mechanical Load

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).



POSITIVE QUALITY
Continuous Quality Assurance

LINEAR PERFORMANCE WARRANTY


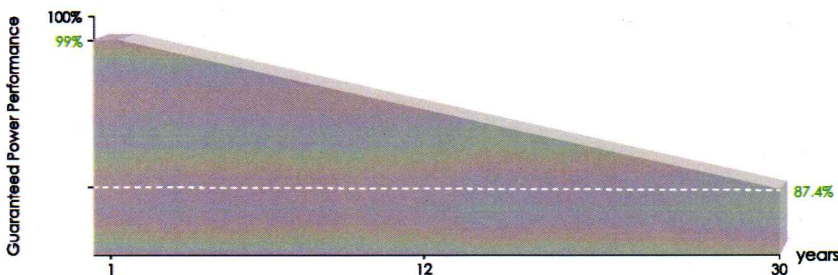


12 Year Product Warranty

30 Year Linear Power Warranty

0.40% Annual Degradation Over 30 years

Engineering Drawings

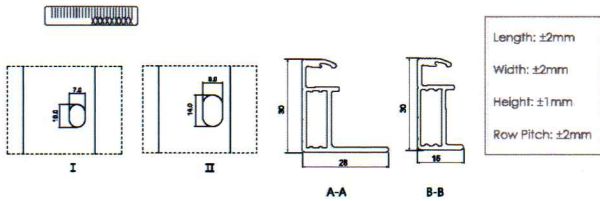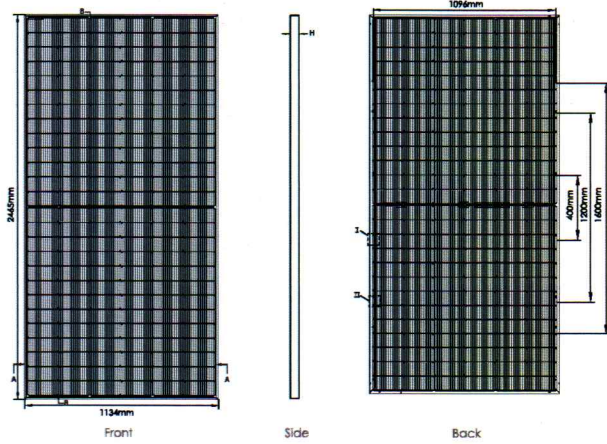


Packaging Configuration

(Two pallets = One stack)

36pcs/pallets, 72pcs/stack, 576pcs/ 40'HQ Container

Electrical Performance & Temperature Dependence

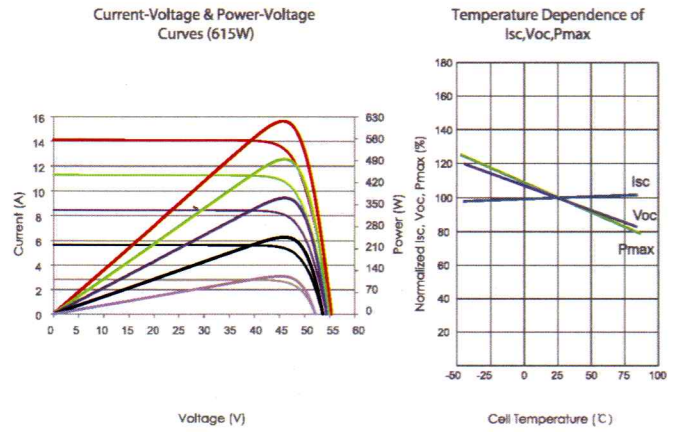

Mechanical Characteristics

Cell Type	N type Mono-crystalline
No. of cells	156 (2×78)
Dimensions	2465×1134×30mm (97.05×44.65×1.18 inch)
Weight	34.6kg (76.38 lbs)
Front Glass	2.0mm, Anti-Reflection Coating
Back Glass	2.0mm, Heat Strengthened Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68 Rated
Output Cables	TUV 1×4.0mm ² (+): 400mm, (-): 200mm or Customized Length

SPECIFICATIONS

Module Type	JKM610N-78HL4-BDV		JKM615N-78HL4-BDV		JKM620N-78HL4-BDV		JKM625N-78HL4-BDV		JKM630N-78HL4-BDV	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	610Wp	459Wp	615Wp	462Wp	620Wp	466Wp	625Wp	470Wp	605Wp	474Wp
Maximum Power Voltage (Vmp)	45.60V	42.35V	45.77V	42.46V	45.93V	42.57V	46.10V	42.68V	46.26V	42.79V
Maximum Power Current (Imp)	13.38A	10.83A	13.44A	10.89A	13.50A	10.95A	13.56A	11.01A	13.62A	11.07A
Open-circuit Voltage (Voc)	55.31V	52.54V	55.44V	52.66V	55.58V	52.79V	55.72V	52.93V	55.86V	53.06V
Short-circuit Current (Isc)	14.03A	11.33A	14.11A	11.39A	14.19A	11.46A	14.27A	11.52A	14.35A	11.59A
Module Efficiency STC (%)	21.82%		22.00%		22.18%		22.36%		22.54%	
Operating Temperature(°C)	-40°C~+85°C									
Maximum system voltage	1500VDC (IEC)									
Maximum series fuse rating	30A									
Power tolerance	0~+3%									
Temperature coefficients of Pmax	-0.29%/°C									
Temperature coefficients of Voc	-0.25%/°C									
Temperature coefficients of Isc	0.045%/°C									
Nominal operating cell temperature (NOCT)	45±2°C									
Refer. Bifacial Factor	80±5%									

BIFACIAL OUTPUT-REAR SIDE POWER GAIN

		JKM610N-78HL4-BDV		JKM615N-78HL4-BDV		JKM620N-78HL4-BDV		JKM625N-78HL4-BDV		JKM630N-78HL4-BDV	
		STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
5%	Maximum Power (Pmax)	641Wp	461Wp	646Wp	466Wp	651Wp	471Wp	656Wp	476Wp	662Wp	481Wp
	Module Efficiency STC (%)	22.91%	22.91%	23.10%	23.10%	23.29%	23.29%	23.48%	23.48%	23.66%	23.66%
15%	Maximum Power (Pmax)	702Wp	502Wp	707Wp	507Wp	713Wp	513Wp	719Wp	519Wp	725Wp	525Wp
	Module Efficiency STC (%)	25.10%	25.10%	25.30%	25.30%	25.51%	25.51%	25.71%	25.71%	25.92%	25.92%
25%	Maximum Power (Pmax)	763Wp	563Wp	769Wp	569Wp	775Wp	575Wp	781Wp	581Wp	788Wp	588Wp
	Module Efficiency STC (%)	27.28%	27.28%	27.50%	27.50%	27.73%	27.73%	27.95%	27.95%	28.17%	28.17%

*STC: Irradiance 1000W/m² Cell Temperature 25°C AM=1.5
 NOCT: Irradiance 800W/m² Ambient Temperature 20°C AM=1.5 Wind Speed 1m/s